

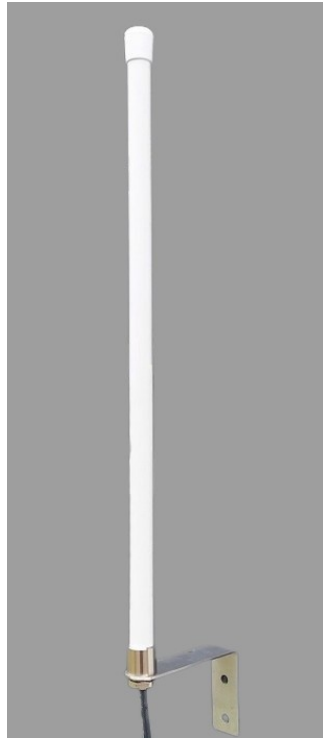


Specification





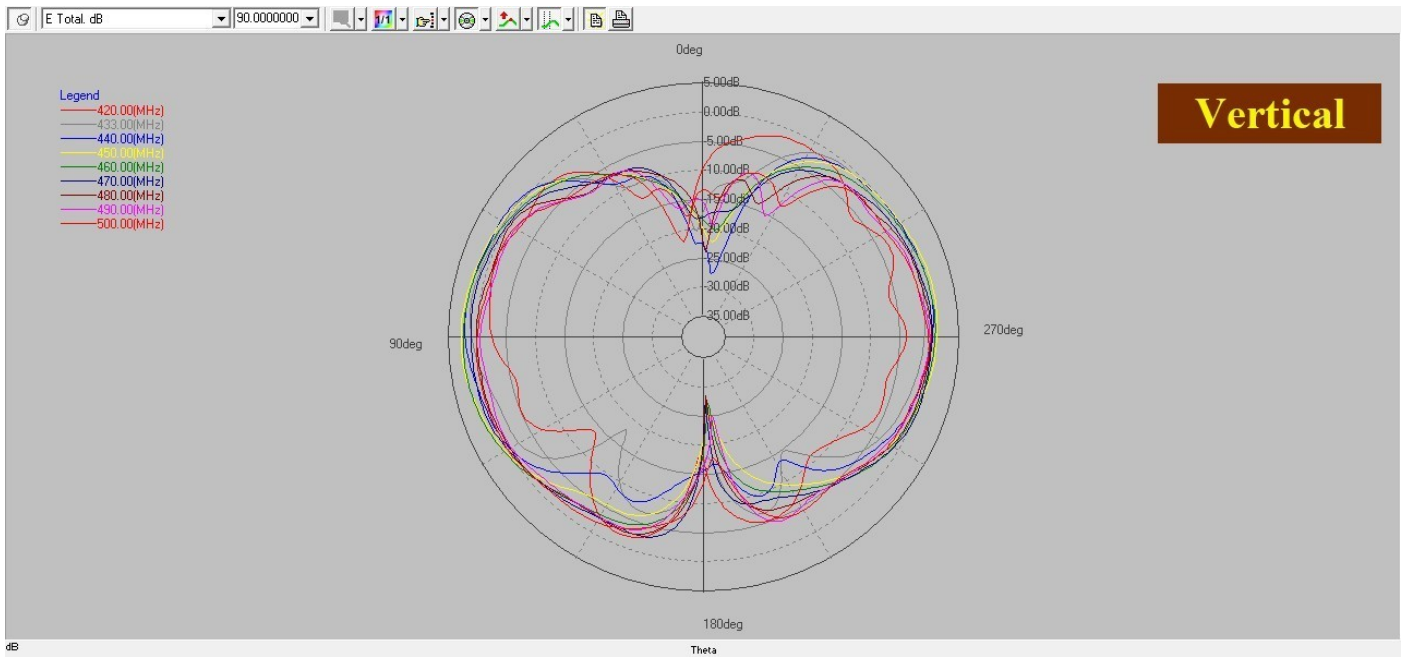


Model	
Electrical Specification	
Frequency	430-470MHz
Polarization	Linear, Vertical
Gain	2.8dBi
H-plane	360°
VSWR	< 2.0
Nominal Impedance	50 Ω
Max Input Power	20 Watts
Mechanical Specification	
Connector	SMA
Radome	ABS
Dimension	
Weight	
Pole Mount Dia	
Temperature Range	-45°C to +75°C
Storage Temperature	-50°C to +75°C

Radio pattern

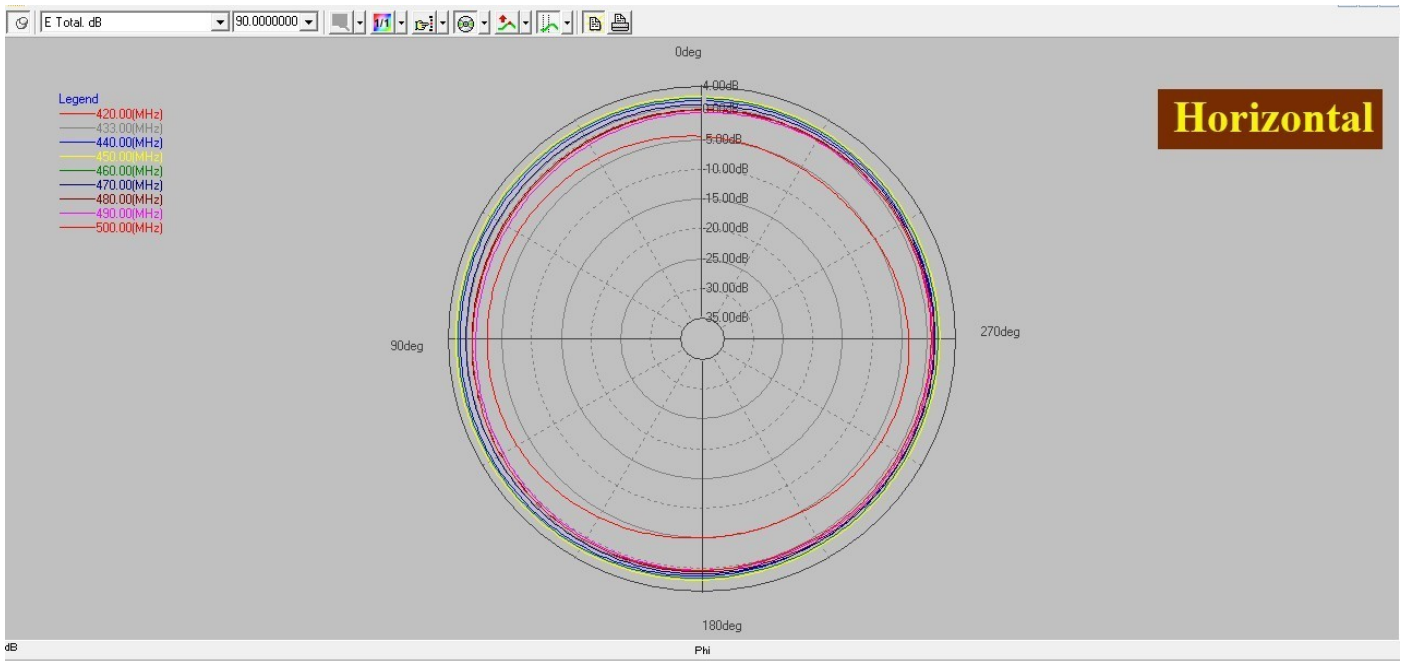

Radio pattern 3D

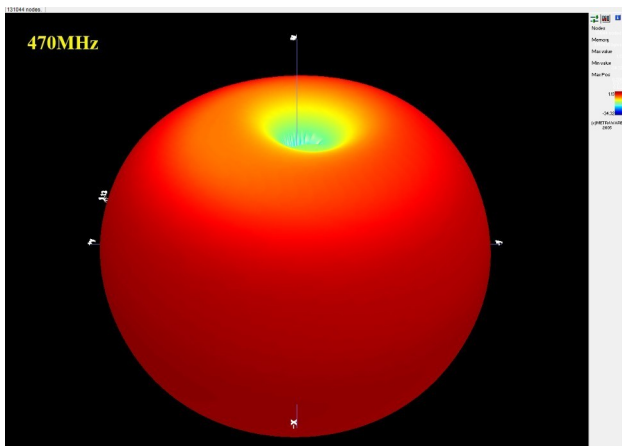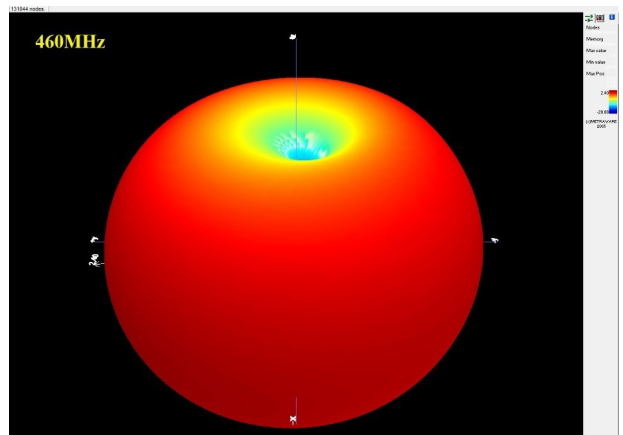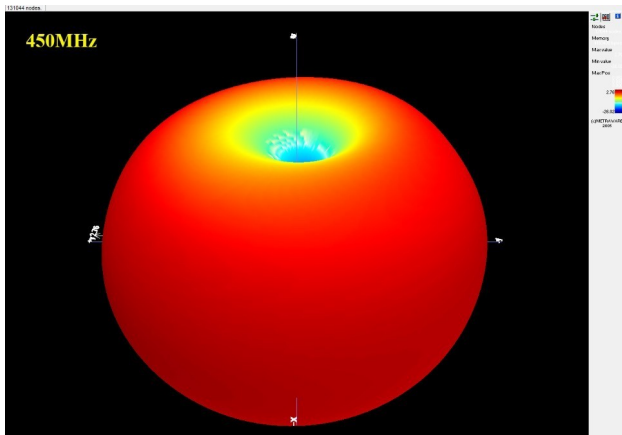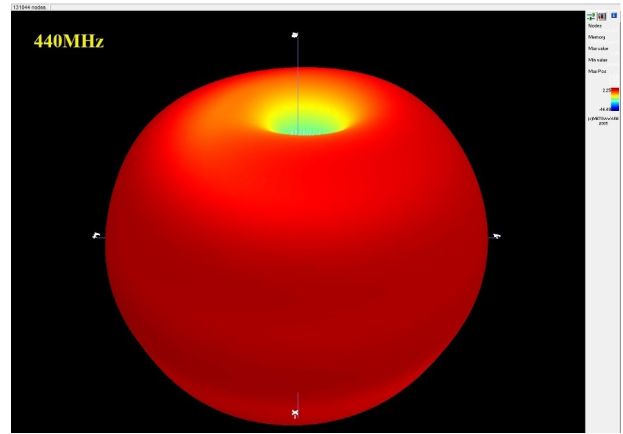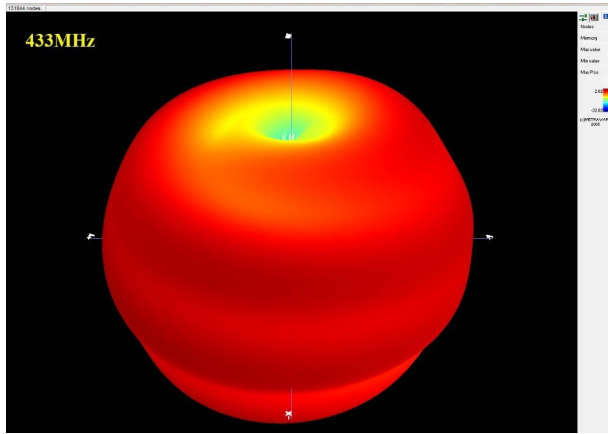

Gain list

